

BROKK[®]

WWW.BROKK.COM/ATTACHMENTS

SHOTCRETE

SHOTCRETE FOR B260-B800

Make your Brokk even more profitable and equip the machine with a smart shotcrete tool! Perfect in the tunneling and mining industries!

Brokk shotcrete

- **Compared to hand held shotcretes:**
 - More efficient
 - Better work environment
- **Less costs than dedicated shotcretes rigs**
- **The Brokk shotcrete has been in operation for several years**
- **One Brokk machine can do a lot of different tunnel/mining jobs if you equip the machine with different attachments!**



The Brokk Family



General dimensions

- Clamp diameter for gunning nozzle - standard: 70 mm (nozzle outer diameter)
- Gunning hose diameter - standard: up to 45 mm (nozzle inside diameter)
- H x L x W: 850 x 2125 x 710 mm (with mounting plate, hoses and gunning nozzle)

Performance

- Oscillation angel - standard: +- 6.25 degrees (580 mm wide area at 1500 distance)
- Oscillation angel - option: +- 4.25 degrees (390 mm wide area at 1500 distance)
- Gunning pressure - normal: 65 bar at gunning nozzle ¹

Air injection (for mixing air in the gunning nozzle):


- Compress air: 0,1-0,2 m³ / min at 3-5 bar (wet Shotcrete)

Weights:

- Shotcrete sprayer only 100 kg
- Total operational weight 210 ²

¹ When used 80 bar Shotcrete at pump gives around 65 bar at gunning nozzle.

² Operational weights with mounting plate, hoses, distance plate and gunning Nozzle.

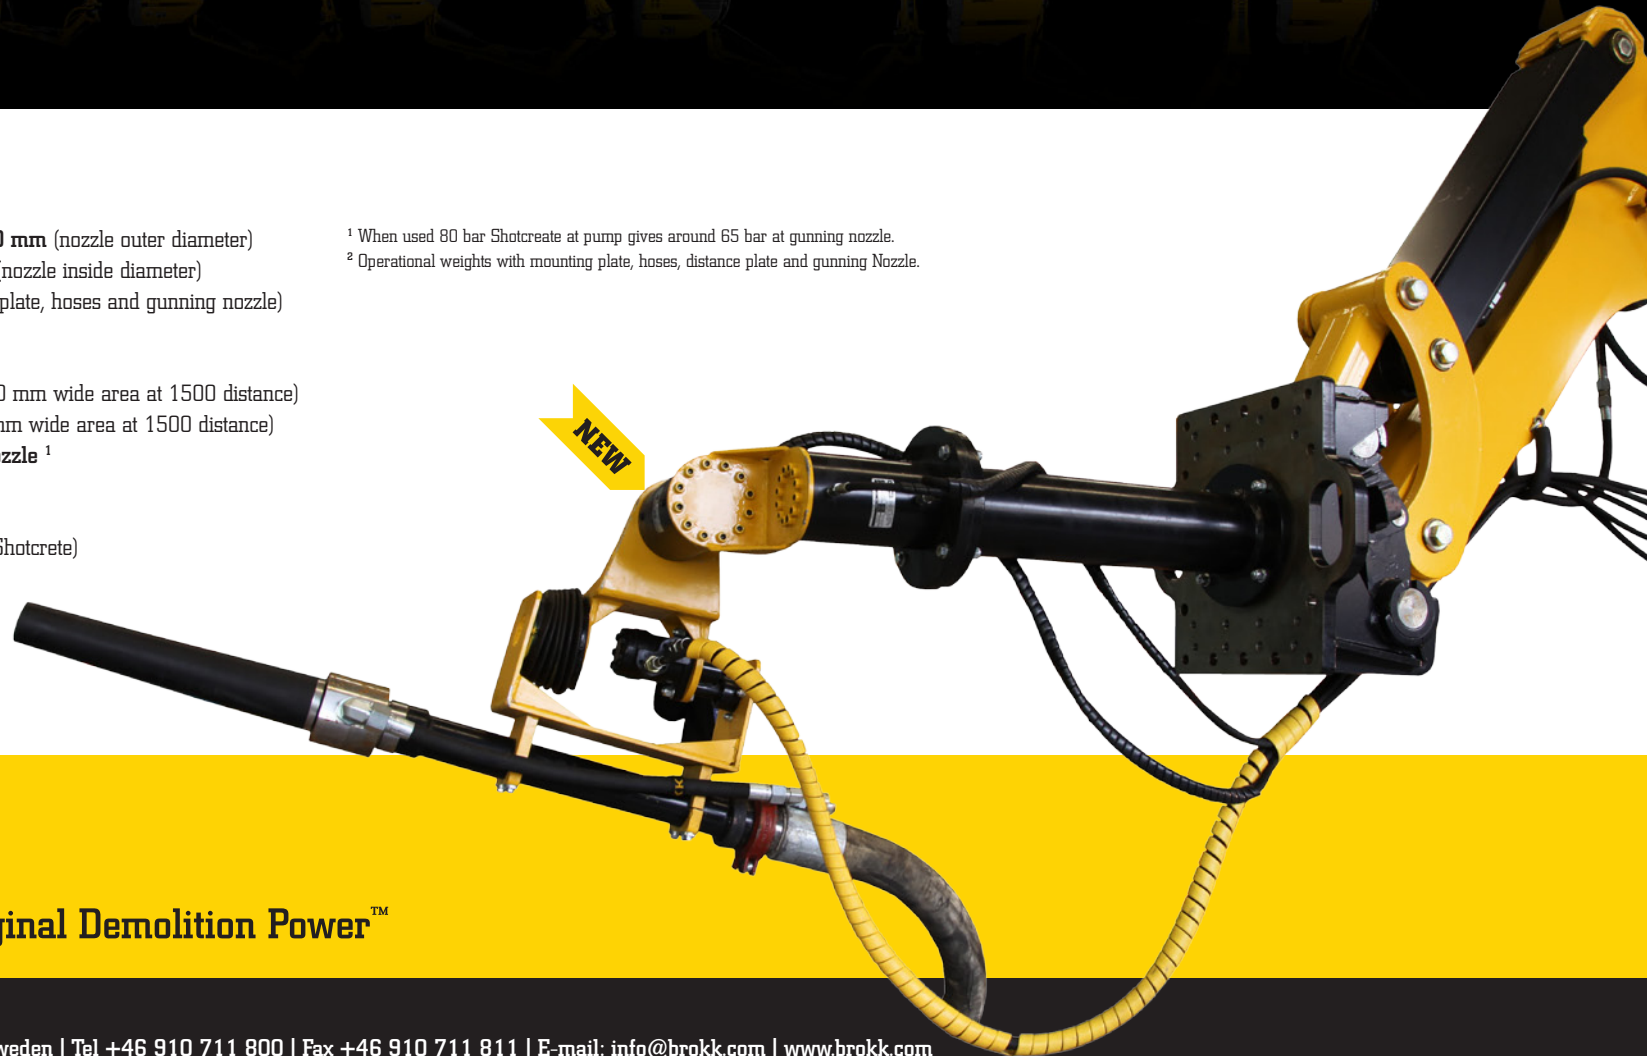

BROKK[®]

Original Demolition Power[™]