


FORCED DRAFT COOLING

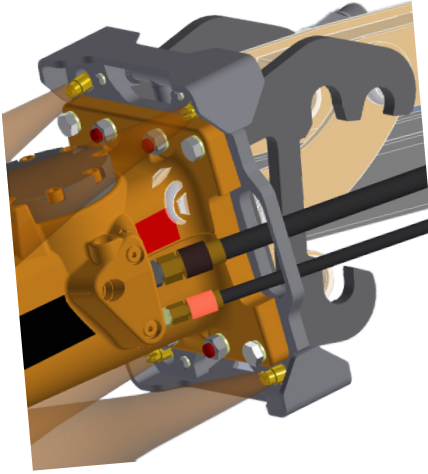

OPTIONS INFO

- Heat option for extreme environments
- For ambient temperatures exceeding 200°C for the tool

Forced draft cooling for hydraulic breaker

Air nipples are mounted on the hydraulic breaker to provide extra cooling.

When:

- In hot and extreme environments

Fact:

- Option for Brokk 110, 160, 280, 400, 400D, 500 and 800
- Requires clean and dry air at 6-8 bar

Note:

- Only available in combination with forced draft cooling for machine

Application:

- Metal Processing (red hot)